
GENERAL CONSTRUCTION & CONCRETE REPAIR

2022 Product Guide



SYSTEM **ARDEX**
PREMIUM PERFORMANCE

CONTENTS

This is ARDEX	3
Innovation	4
System ARDEX	5
Warranties	7
Training	8
Sustainability	9
Support	10

STRUCTURAL CONCRETE REPAIR

ARDEX BR 460 Flow	13
ARDEX BG 90 GP	13

NON-STRUCTURAL CONCRETE REPAIR

ARDEX A 46	15
ARDEX A 30	15
ARDEX A 48	16
ARDEX K 900 BF	18

PRIMERS, SEALERS & BARRIER COATINGS

ARDEX WPM 300	19
---------------	----

JOINT SEALANTS

ARDEX RA 040	21
ARDEX RA 54	21

STRUCTURAL CRACK REPAIR

ARDEX RA 142	23
ARDEX RA 144	23
ARDEX RA 146	24
Rhino Crack Lock	24

CONSTRUCTION ADHESIVES

ARDEX RA 56	27
ARDEX RA 88	27
ARDEX RA 84	28

ACCESSORIES

	29
--	----

THIS IS ARDEX

For more than 70 years, ARDEX has been the quality leader for an entire industry. ARDEX specialises in high quality construction materials for substrate preparation, floor levelling, waterproofing and the fixing and grouting of surface materials.

When it comes to floor levelling and adhesives, waterproofing membranes and decorative finishes, ARDEX is the brand of choice for installers and wholesalers.

ARDEX is an independent family-owned business, which means that, in our permanent efforts to achieve market-shaping innovations, we are able to retain our most important tradition: uncompromising quality.

Strong internal growth and intelligent acquisitions in foreign markets have put the ARDEX Group on the map with 55 subsidiaries, and over 3,300 employees in over 100 countries. It's no coincidence ARDEX is regarded as the premium partner in the building materials sector.





INNOVATION

Since it was founded in 1949, ARDEX has been known all over the globe as an innovative leader for specialist building products. As the inventors of self-levelling and smoothing compounds, ARDEX has a history of breakthrough innovations, that have driven and changed the market.

ARDEX products including Arditex, X 77, FG 8 Grout and WeldTec™ are firmly established as benchmarks for use worldwide.

The heart of ARDEX product development is the central laboratory in Witten, Germany. This lab partners with centres of excellence around the world to ensure the consistent quality of the products and maximum responsiveness to local market needs.

Innovation at ARDEX is not confined to research and development. It is an organic system comprising of cutting-edge customer insight research, close cooperation with associations and universities, and strong interaction between sales, marketing, technical services and purchasing.

SYSTEM ARDEX

ARDEX is committed to developing products that are easy to use and offer high performance. Each product is the careful result of research and development combined with the input of contractors and installers to ensure absolute product compatibility.


Our systematic global Stage Gate Process for the introduction of new products is designed to optimise speed to market as well as to ensure superior quality and reliability for our customers. On-site product testing is an integral part of that process.

ARDEX products, systems and services are designed to ensure professional contractors have the competitive advantage of a lower total cost of installation through superior performance.



As a longstanding partner to trade, we know the practical requirements first-hand. Our vast experience with materials and working methods and our constant dialogue with customers in skilled trades are our most important source of inspiration. We draw on this to develop product systems that command respect in the market place. Our systems are optimally matched and extremely cost-effective thanks to their ease and speed of processing and high coverage.





ARDEX IS THE BRAND OF
CHOICE FOR SPECIFIERS
AND INSTALLERS GLOBALLY

WARRANTIES

The major point of difference between a SystemARDEX™ warranty and other warranties is the extent of cover provided for the owner or builder. Most competitor product warranties cover only the replacement of the defective product. That is further reduced through a discounting structure based on years of service prior to the claim. And usually, no cover is provided for the costs incurred in removing the defective product and installing the replacement product.



A SystemARDEX warranty covers:

- The costs of repair to which the product is applied and damaged by removal of the defective product where such proves necessary.
- The cost of reinstating or repairing the product or system including material costs of equal or equivalent products.
- The costs of rectifying any material covering the product.

SystemARDEX™ warranty claims are NOT discounted by years of service of defective products or any damage to the surface or material.

The SystemARDEX™ Warranty is project specific and warrants that the SystemARDEX™ combination of products that forms the total system are free from defects, are 100% compatible and the system combination is suitable for the purpose intended.



TRAINING

Our industry, like any other, requires on-going training to keep up with changes in legislation, standards and materials. ARDEX offers training for both the applicator as well as staff.

For members of the construction industry committed to providing a high level of workmanship, ARDEX can help stay up to date, and increase both knowledge and confidence.

Training courses offered by ARDEX:

- CPD seminars for specifiers
- ARDEX undertile liquid waterproofing training
- ARDEX floor levelling training
- ARDEX WeldTec™ Membrane training
- ARDEX external waterproofing training - Butynol, TPO and Torch On
- ARDEX retail training

In order to encourage information exchange and creativity across borders, ARDEX strongly supports international career paths. We realise that we need the most talented people to maintain and extend our innovation leadership.

SUSTAINABILITY

Sustainability is a business principle at ARDEX where we focus on creating products of premium quality and functional performance, coupled with exceptional reliability and durability. In addition, sustainability is one of the cornerstones of our corporate philosophy. We demonstrate our commitment to the pillars of sustainability – environment, economic and social, in both our daily work, as well as our long-term goals.



Long before it became a buzzword, the concept of sustainability was already an integral part of the ARDEX corporate philosophy.

- High-coverage ARDEX products takes care of large surface areas with minimal material, cutting down on processing, transport and waste packaging.
- Reduce back-and-forth travel to the building site with ARDEX products providing fast, easy installation.
- ARDEX products are engineered for a long life, meaning less wastage and more saved resources.
- ARDEX's remedial and repair products are great for refurbishments - eliminating the need for a demolition and new build using up more resources.
- High-quality ARDEX sub-floor smoothing compounds create extremely even surfaces, meaning far less adhesive is required to affix the flooring.

SUPPORT SERVICES

The ARDEX support team is dedicated to eliminating guesswork, improving on-site efficiencies and taking the risk out of product and system installation.

For information on products, field support, customer service, training products or product demonstrations please contact us:

0800 227 339


ardex.co.nz

Also visit our Facebook and Youtube pages for product news and updates, introduction to new products and access to our extensive video library.

 **facebook.com/ARDEXNZ**

 **youtube.com/ardexaustralia**

 **@ardexnewzealand**

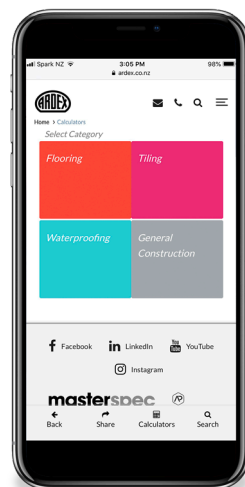

The ARDEX website is optimised for mobile devices and features an easy-to-use product calculator tool, as well as other helpful tools available in the palm of your hand. Scan the QR code below to access the ARDEX website on your mobile phone.



ardex.co.nz



STRUCTURAL CONCRETE REPAIR

ARDEX BR 460 FLOW

STRUCTURAL
MICRO-CONCRETE



ARDEX BR 460 FLOW is a high performance, flowable repair mortar designed for reinstating horizontal concrete surfaces damaged through concrete spalling and other chemical or mechanical causes.

- Flowable, pourable
- Shrinkage compensated
- Contains active corrosion inhibitor
- High early and final strength

Typical use

- Reinstating damaged concrete surfaces
- Use in conjunction with ARDEX BRX 60 LO anodes for ultimate corrosion control and cathodic protection

Location

- External or internal
- Structural applications
- Vertical, horizontal, overhead

Resistivity <15,000Ωcm

Coverage 0.5m² at 20mm

Thickness 20 – 200mm

Drying Time Initial set: 5 – 8 hours
Final set: 6 – 9 hours

Code 20kg bag: 24543

ARDEX BG 90 GP

GENERAL PURPOSE
CONSTRUCTION GROUT



ARDEX BG 90 GP is a general purpose, high-strength, Class-A-Type construction grout that can be mixed to a non-slump or pourable mix and is suitable for a wide range of projects and applications.

- Versatile - Packable, pourable, pumpable
- Positive expansion in plastic state
- Shrinkage compensated in hardened state
- High strength (>70MPa after 28 days)

Typical use

- General purpose grouting applications
- Base plates, machine plates, equipment support
- Column bases (steel and precast concrete)
- Precast panel connections
- Underpinning
- Void filling and dry packing
- Conveyor supports

Location

- External or internal
- Structural applications

Thickness 12 – 100mm

Drying Time Stiff: 30 – 60 mins
Plastic: 3 – 4 hours
Trowelable: 1 – 3 hours

Code 20kg bag: 25104

NON-STRUCTURAL CONCRETE REPAIR

ARDEX A 46

PATCHING AND REPAIR MORTAR



ARDEX A 46 is a rapid-setting slump-free mortar for external repairs. ARDEX A 46 is easy to use, mixes and trowels easily, and gives a smooth finish on both walls and floors.

- Quick drying - trafficable after 2 – 3 hours
- Easy to install - 2 – 30mm in one application
- Slump free

Typical use

- Repairing and resurfacing concrete subfloors and stair treads
- Patch repairs to walls and floors
- Creating ramps
- Forming coves
- Filling cracks

Location

- External or internal
- Above or below-grade applications
- Horizontal or vertical surfaces

Coverage 7m² at 2mm

Thickness 2 – 30mm in one application

Drying Time Initial set: 15 – 20 mins
Light foot traffic: 2 – 3 hours
Ready for coatings: 24 – 48 hours

Code 20kg bag: 25354

ARDEX A 30

FEATHER EDGE PATCHING COMPOUND



ARDEX A 30 is a slump-free patching compound that can be applied down to a feather finish. ARDEX A 30 dries fast through hydration to a virtually tension-free compound.

- Slump free
- Apply down to a featheredge
- Trafficable in 60 minutes

Typical use

- Filling cavities, holes
- Levelling and repairing steps and landings
- Filling uneven surfaces
- Patching repairs to walls and floors

Location

- Internal
- Above or below-grade applications
- Horizontal or vertical surfaces

Coverage 16m² at 1mm

Thickness 0 – 20mm in one application

Drying Time Initial set: 20 mins
Light foot traffic: 1 hour
Ready for coatings: 1 hour

Code 20kg bag: 11285

ARDEX A 48

RAPID-SETTING SCREED MIX



ARDEX A 48 is a rapid-set cement screed designed for all types of floor coverings, and is premixed with aggregate for simple and fast onsite installation.

- Fast-cure - tile on top in 4 hours
- Premixed cement and aggregate
- Shrinkage and tension free

Typical use

- Bonded or unbonded screed applications
- Floating screed
- Heated screed
- Ideal for moisture sensitive floorcoverings

Location

- External or internal

Coverage 1m² at 10mm

Thickness Bonded: minimum 15mm
Unbonded: minimum 35mm

Drying Time Working time: 60 mins
Walkability: 4 hours
Ready for tiling: 4 hours
Ready for smoothing cements: 24 hours
Ready for textile floorcoverings: 48 hours

Code 20kg bag: 13002

ARDEX K 900 BF

BULK-FILL LEVELLING COMPOUND



ARDEX K 900 BF is designed for levelling subfloors prior to applying surface coatings. ARDEX K 900 BF features a coarse sand aggregate and minimal flow for easy, efficient installations of thick layers.

- Strong - suitable for heavy traffic
- Pumpable using a suitable automatic mixing pump
- Economical - ideal for levelling up to 90mm thick

Typical use

- Levelling sub-floors prior to applying surface coatings
- Can be used as a fast-set mortar when water mixing ratio is reduced

Location

- Internal
- Horizontal surfaces

Coverage 1m² at 10mm

Thickness 3mm – 90mm in one application

Drying Time Trafficable: 4 hours (90mm)
Ready for ARDEX Smoothing cements after 16 hours.

Thicker layers may require longer.

Code 20kg bag: 24954



PRIMERS, SEALERS AND BARRIER COATINGS

ARDEX WPM 300

WATER-BASED EPOXY
MOISTURE BARRIER



ARDEX WPM 300 is a two component water-based epoxy polyamide membrane/barrier coating which withstands hydrostatic pressure. ARDEX WPM 300 is ideal for application to green concrete or wet/damp surfaces.

- Can be applied to damp surfaces
- Suitable for application to green concrete
- Negligible odour

Typical use

- Low water vapour transmission coating
- Hydrostatic pressure resistant waterproofing membrane
- Waterproofing barrier on negative side of below grade surfaces
- Barrier seal coating over damp, green, or efflorescence producing concrete

Location

- External or internal
- Vertical or horizontal

Coverage As a moisture barrier: 30m²
As a barrier seal coating: 60m²

Drying Time Recoat: 4 hours
Full cure: 7 days

Code 20L kit: 8000021



JOINT SEALANTS

ARDEX RA 040

POLYURETHANE-BASED
JOINT SEALANT



ARDEX RA 040 is a one-component, polyurethane based joint sealant. It has excellent bond strength to most porous and non-porous substrates without the use of a primer.

- Easy to use - one component
- Non-sag
- Excellent primerless adhesion
- Suitable for temperatures from -30 – 120°C

Typical use

- Expansion joints up to 25% anticipated movement
- Joint sealing in pre-fabricated and tilt-up buildings
- Sealing between window and door frames
- Sealing moving cracks

Location

- External or internal
- Vertical, horizontal, overhead

Elongation 500%

Movement Capability +/-25% of joint width

Coverage 24m at consistent 5mm ø bead

Drying Time Skin formation: 1 hour
Cure time: 24 hours (2mm)

Code 600mL sausage: 24541

ARDEX RA 54

RAPID-CURING POLYUREA
JOINT SEALANT



ARDEX RA 54 is designed for filling joints in industrial floor applications receiving heavy-duty vehicle traffic.

- Rapid cure time - trafficable in 90 minutes
- Can be applied in temperatures down to -40°C
- Suitable for heavy-duty vehicle traffic
- Self levelling

Typical use

- Filling interior control joints
- Filling new construction saw joints
- Industrial flooring applications

Location

- Internal, or external where minimal thermal cycling will occur
- Horizontal surfaces

Elongation 82%

Movement Capability 10 – 12%

Coverage 3.1m for 3x25mm joint

Drying Time Shaving time: 45 min
Trafficable: 90 min

Code 627mL: 22778



STRUCTURAL CRACK REPAIR

ARDEX RA 142

HAIRLINE CRACK
STRUCTURAL INJECTION EPOXY



ARDEX RA 142 is a super low viscosity, two-component epoxy adhesive perfect for gravity-feed and pressure injection repair of hairline to fine width horizontal cracks.

- Ultra-low viscosity - suitable for cracks down to 0.05mm
- Solvent free
- Pressure injection and gravity feed structural crack repair

Typical use

- Repair of structural hairline to fine-width cracks
- Spall repair when mixed with aggregate to create an epoxy mortar
- Structural crack repair with Rhino Crack Lock

Location

- External or internal
- Vertical or horizontal
- Structural applications

Coverage 142m for 1x3mm crack

Crack Width 0.5mm – 3mm

Drying Time Full cure: 24 hours

Code 470mL: 22780

ARDEX RA 144

STRUCTURAL CRACK
INJECTION EPOXY



ARDEX RA 144 is a low viscosity, high modulus structural epoxy adhesive ideal for a variety of repair projects including horizontal gravity-feed repair of fine-medium sized cracks.

- Ideal for fine to medium width cracks
- Solvent free
- Exceptional bonding and sealing capabilities

Typical use

- Repair of structural fine-medium width cracks
- Spall repair when mixed with an aggregate to create an epoxy mortar
- Shear fracture repairs on interior and exterior concrete slabs
- Structural crack repair with Rhino Crack Lock

Location

- External or internal
- Vertical or horizontal
- Structural applications

Coverage 7m for 6x10mm crack

Crack Width 3mm – 6mm

Drying Time Full cure: 24 hours

Code 470mL: 22791

ARDEX RA 146

BLINDSIDE CRACK INJECTION EPOXY



ARDEX RA 146 is a thixotropic structural epoxy injection system ideal for repair of medium sized cracks and blindside cracks - when one side of the crack is not accessible.

- Ideal when one side of a crack is inaccessible
- Pressure-injection thixotropic gel
- Solvent free

Typical use

- Repair of structural medium-large width cracks
- Structural crack repair with Rhino Crack Lock
- Blindside crack repair

Location

- External or internal
- Vertical or horizontal
- Structural applications

Coverage 7m for 6x10mm crack

Crack Width 6mm – 10mm

Drying Time Full cure: 24 hours

Code 470mL: 22792

RHINO CRACK LOCK

CRACK BRIDGING STITCH



The Rhino Concrete Crack Lock is a revolutionary new product made of carbon fibre to improve concrete crack repair. Once installed, the Crack Lock permanently bonds both sides of the crack together.

- Prevents further cracking in concrete
- Increases seismic strength to repairs
- Non-corrosive and alkali resistant

Typical use

- Stopping and preventing further cracks in both structural and non-structural concrete
- For increasing seismic strength to repairs after earthquakes
- With ARDEX epoxy crack repair systems

Location

- External or internal
- Vertical or horizontal
- Structural applications

Code 20 stitches: 30440



CONSTRUCTION ADHESIVES

ARDEX RA 56

LOW VISCOSITY CRACK
REPAIR ADHESIVE



ARDEX RA 56 is an ultra-low viscosity, rapid curing, hybrid polyurethane adhesive and is ideal for concrete repair when minimal down-time is crucial.

- Ultra-low viscosity penetrates deep into cracks
- Trafficable in 60 mins
- Cures stronger than concrete

Typical use

- Repair of non-structural hairline cracks
- Spall repair with addition of aggregate

Location

- External or internal
- Non-structural applications

Elongation 5%

Drying Time Gel time: 2 – 3 mins
Tack-free time: 12 mins
Full cure: 60 mins

Code 254mL: 19930
627mL: 22779

ARDEX RA 88

EPOXY REPAIR
ADHESIVE



ARDEX RA 88 is a multi-purpose, high performance ceramic blend epoxy adhesive. Although being a 2-component epoxy, ARDEX RA 88 is ready to apply and requires no mixing.

- Non-sag
- Ready to apply - no mixing needed
- Fast cure time
- Suitable for use in immersed applications

Typical use

- Repair adhesive for almost any material
- Repairing holes, spalls and cracks in concrete
- Repairing rotten wood
- Installing anchor bolts
- Repairing handrails
- Capping gel for ARDEX Crack Injection applications
- Structural crack repair with Rhino Crack Lock

Location

- External or internal
- Horizontal, vertical, overhead

Drying Time Gel time: 8 mins
Working time: 20 mins
Cure time: 2 hours

Code 254mL: 19927

ARDEX RA 84

FAST-CURE ACRYLIC ADHESIVE



ARDEX RA 84 is a two-component, non-sag acrylic system used for anchoring and dowelling applications in uncracked concrete using threaded rod and rebar with an ultra-fast cure time.

- Full cure in under 30 mins
- Moisture-insensitive - suitable for use on wet substrates
- Styrene free
- Service temperature from -40 – 80°C

Typical use

- Adhering dowel bars and tie bars for full-depth concrete repairs
- Short-term tensile anchoring and shear loading
- Bonding agent
- Capping gel for ARDEX Crack Injection applications

Location

- External or internal
- Suitable in water-saturated environments

Drying Time Working time: 5 min
Full cure (dry concrete): 30 min
Full cure (damp concrete): 60 min

Code 300mL: 30509

ACCESSORIES

DUAL CARTRIDGE CAULKING GUN

Code: 13581



INJECTION MIXING NOZZLE

3 Pack: 23615



NOZZLE FOR RA 54, 84, 88

3 Pack: 19972



NOZZLE FOR RA 56

3 Pack: 19973



INJECTION T PORT

25 Pack: 23617



[illegible]This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There is no text or other markings on the paper.

A modern architectural interior featuring a large, light-colored wall with a prominent triangular cutout. To the right, a wide staircase with dark, textured steps leads upwards. In the foreground, a long, low, dark-colored bench or reception desk is visible. The overall aesthetic is clean, minimalist, and geometric.

0800 227 339
ardex.co.nz

JULY 2022