

CONTENTS

This is ARDEX	5	ARDEX WA 98	34
Innovation	6	ARDEX WPM 290	35
System ARDEX	7	ARDEX WPM 710 DT	35
Warranties	9		
Training	10	BUTYNOL ROOFING	
Sustainability	11		
Support	12	ARDEX BUTYNOL	37
		ARDEX WA 98	37
PRODUCT SYSTEMS		ARDEX WPM 290	38
		ARDEX WPM 299	38
Flat Roofing - Residental and Commercial	14	ARDEX DETAIL TAPE	39
Flat Roofing - Heat-Sensitive Substrate option	15	ARDEX SEAM TAPE	39
Flat Roofing - Torch Applied Concrete Substrate	16		
Flat Roofing - Industrial Mechanically Fastened	17	TPO ROOFING	
Flat Roofing - Industrial Fully Adhered	18		
Flat Roofing - Remedial	19	ARDEX WPM 612	41
Flat Roofing - Warm Roof	20	ARDEX WPM 615	41
Flat Roofing - Green Roof	21	ARDEX WPM 649	42
Flat Roofing - Guttering	22	ARDEX WPM 657	42
External Tiling - Tiled Deck	23	ARDEX QUICKSEAM FLASHING	43
Deck System - Timber Deck	24	ARDEX HD SEAM PLATES	43
Below Grade System - Damp Proofing	25	ARDEX TPO MEMBRANE DETAILING	44
Below Grade System - Torch Applied	26	ARDEX WPM 623	44
Below Grade System - Tanking	27	ARDEX FASTENERS	45
Internal Tiling - Liquid Membrane	28	ARDEX WPM 651	45
Internal Tiling - WeldTec™ Sheet Membrane	29		
Internal Vinyl Floor Covering	30	TORCH-APPLIED ROOFING	
WELDTEC™ ROOFING		ARDEX WPM 114	47
		ARDEX WPM 117	47
ARDEX WPM 712	33	ARDEX WPM 120	48
ARDEX WPM 715	33	ARDEX WPM 180	48
ARDEX WPM 717	34	ARDEX WPM 189	49

ARDEX WPM 189+	49	ARDEX WeldTec™ DETAILING	65
ARDEX WPM 240	50	ARDEX UD 150	65
ARDEX WPM 247	50		
ARDEX BITUMINOUS SEALANT	51	LIQUID MEMBRANES	
DAMP-PROOF MEMBRANES		ARDEX WPM 002	67
		ARDEX WPM 155 RAPID	67
ARDEX WPM 3000X	53	ARDEX WPM 300	68
ARDEX WPM 5000HD	53	ARDEX WPM 368	68
ARDEX DRS 10 GC	54	ARDEX DECKWEB	69
ARDEX BITUMINOUS SEALANT	54	ARDEX ST TAPE	69
ARDEX WPM 240	55	ARDEX MULTIPRIME	70
ARDEX WPM 247	55	ARDEX P 9	70
BELOW GRADE AND TANKING MEMBRANES		THERMAL INSULATION BOARDS	
ARDEX WPM 179	57	ARDEX POLYISO INSULATION BOARD	73
ARDEX WPM 188	57	ARDEX HD COVER BOARD	73
ARDEX WPM 195	58	ARDEX INSULATION PLATES	74
ARDEX WPM 196	58	ARDEX FASTENERS	74
ARDEX WPM 1000 RR	59		
ARDEX WPM 1500	59	DRAINAGE SYSTEMS	
ARDEX DRS 10 GC	60		
ARDEX WPM 1950	60	ARDEX UD 150	77
ARDEX WPM 1955	61	ARDEX DRS 10 GC	77
ARDEX WPM 1960	61	ARDEX UD 158	78
WELDTEC™ UNDERTILE MEMBRANES			
ARDEX WPM 750	63		
ARDEX WPM 1000	63		
ARDEX WA 98	64		
ARDEX AF 620	64		

ARDEX HAS A HISTORY OF BREAKTHROUGH INNOVATIONS, WHICH HAVE CHANGED THE INDUSTRY.

THIS IS ARDEX

For more than 60 years, ARDEX has been the quality leader for an entire industry. ARDEX specialises in high quality construction materials for substrate preparation, floor levelling, waterproofing and the fixing and grouting of surface materials.

When it comes to floor levelling and adhesives, waterproofing membranes and decorative finishes, ARDEX is the brand of choice for installers and wholesalers.

> ARDEX is an independent family-owned business, which means that in our permanent efforts to achieve market-shaping innovations, we are able to retain our most important tradition: uncompromising quality.

> Strong internal growth and intelligent acquisitions in foreign markets have put the ARDEX Group on the map with 53 subsidiaries, and over 3,000 employees in over 100 countries. It's no coincidence ARDEX is regarded as the premium partner in the building materials sector.





INNOVATION

Since it was founded in 1949, ARDEX has been known all over the globe as an innovation leader for specialist building products. As the inventors of self-levelling and smoothing compounds, ARDEX has a history of breakthrough innovations, that have driven and changed the market.

ARDEX products including Arditex, X 77, Abaflex, FG 8 Grout and WeldTec™ are firmly established as benchmarks for use worldwide.

> The heart of ARDEX product development is the central laboratory in Witten, Germany. The lab partners with centres of excellence around the world to ensure the consistent quality of the products and maximum responsiveness to local market needs.

> Innovation at ARDEX is not confined to research and development. It is an organic system comprising cutting-edge customer insight research, close cooperation with associations and universities, and strong interaction between sales, marketing, technical service and purchasing.

SYSTEM ARDEX

ARDEX is committed to developing products that are easy to use and offer high performance. Each product is the careful result of research and development combined with the input of contractors and installers to ensure absolute product compatibility.

Our systematic global Stage Gate Process for the introduction of new products is designed to optimise speed to market as well as to ensure superior quality and reliability for our customers. On-site product testing is an integral part of that process.

ARDEX products, systems and services are designed to ensure professional contractors the competitive advantage of a lower total cost of installation through superior performance.



As a longstanding partner to trade, we know the practical requirements first-hand. Our vast experience with materials and working methods and our constant dialogue with customers in the skilled trades are our most important source of inspiration. We draw on this to develop product systems that command respect in the market place. Our systems are optimally matched and extremely cost-effective thanks to their ease and speed of processing and high coverage.





ARDEX IS THE BRAND OF CHOICE FOR SPECIFIERS AND INSTALLERS GLOBALLY

WARRANTIES

The major point of difference between an ARDEX warranty and other warranties is the extent of the cover provided for the owner or builder. Most competitor product warranties cover only the replacement of the defective product. That is further reduced through a discounting structure based on years of service prior to the claim. And usually, no cover is provided for the costs incurred in removing the defective product and installing the replacement product.



An ARDEX warranty covers:

- The costs of repair to which the product is applied and damaged by removal of the defective product where such proves necessary.
- The cost of reinstating or repairing the product or system including material costs of equal or equivalent products.
- · The costs of rectifying any material covering the product.

ARDEX warranty claims are NOT discounted by years of service of defective products or any damage to the surface or material.

The System ARDEX Warranty is project specific and warrants that the System ARDEX combination of products that forms the total system are free from defects, are 100% compatible and the system combination is suitable for the purpose intended.



TRAINING

Our industry, like any other, requires ongoing training to keep up with changes in legislation, standards and materials. ARDEX offers training for both the applicator as well as staff.

For members of the construction industry committed to providing a high level of workmanship, ARDEX can help stay up to date, and increase both knowledge and confidence.

Training courses offered by ARDEX:

- · CPD seminars for specifiers
- ARDEX undertile liquid waterproofing training
- ARDEX floor levelling training
- ARDEX WeldTec™ Membrane training
- ARDEX exterior waterproofing training Butynol, TPO and Torch On
- · ARDEX retail training

In order to encourage information exchange and creativity across borders, ARDEX strongly supports international career paths. We realise that we need the most talented people to maintain and extend our innovation leadership.

SUSTAINABILITY

Sustainability is one of the defining issues of our time. Climate change and the global financial crisis have driven home the consequences of short-term goal action. Sustainable operations shape the future through environmental protection and sparing use of economic resources.



Long before it became a buzzword, the concept of sustainability was already an integral part of the ARDEX corporate philosophy.

- High-coverage ARDEX products let you take care of large surface areas with a minimum of material, which cuts down on processing, transport and waste packaging.
- Reduce back-and-forth travel to the building site with ARDEX products providing fast, easy installation.
- · ARDEX products are engineered for a long life, meaning less wastage and more saved resources.
- · ARDEX's remedial and repair products are great for refurbishments - eliminating the need for a demolition and new build using up more resources.

SUPPORT SERVICES

The ARDEX support team is dedicated to eliminating guesswork, improving on site efficiencies and taking the risk out of product and system installation.

For information on products, field support, customer service, training products or product demonstrations please contact us:

0800 2 ARDEX

www.ardex.co.nz

Also visit our Facebook and Youtube pages for product news and updates, introduction to new products and access to our extensive video library.

- www.facebook.com/ARDEXNZ
- www.youtube.com/ardexaustralia
- @ardexnewzealand




The ARDEX website is optimised for mobile devices and features an easy-to-use product calculator tool, as well as other helpful tools available in the palm of your hand. Scan the QR code below to access the ARDEX website on your mobile phone.







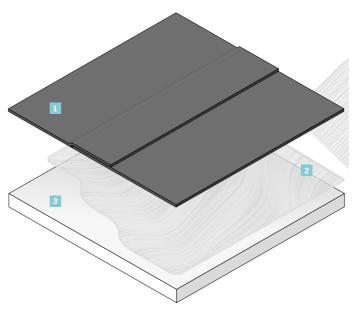





ARDEX WPM 712

WeldTec™ 1.2mm weldable waterproofing membrane



ARDEX WA 98

Waterproofing membrane adhesive

ARDEX WPM 715

WeldTec™ 1.5mm weldable waterproofing membrane

Selected substrate


- Concrete
- Timber

3

- Modified bitumen
- ARDEX Polyiso or HD Cover Board
- CFC sheet
- Galvanised metal
- Zincalume
- Polyurethane foam

ARCHITECTS, SPECIFIERS AND **DESIGNERS**

Torch Applied - Heat-Sensitive Substrate option

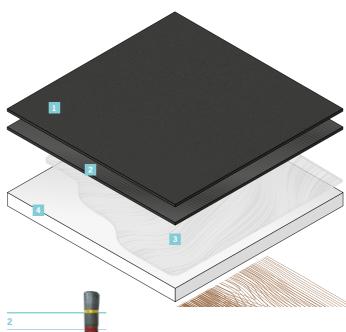



ARDEX WPM 189+

Ceramic-coated top layer bitumen membrane



ARDEX WPM 117

Self-adhesive, fibre-reinforced bituminous membrane



ARDEX WPM 240

Solvent-based bitumen primer

ARDEX **WPM 247**


Water-based bitumen primer

Selected substrate

- Timber
- ARDEX Polyiso Board

ARCHITECTS, SPECIFIERS AND **DESIGNERS**

Torch Applied - Concrete Substrate option

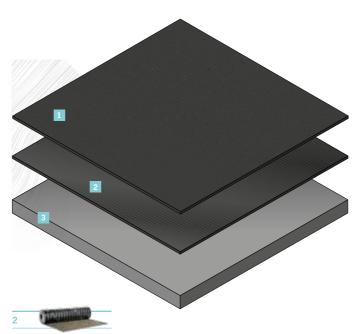



ARDEX WPM 189+

Ceramic-coated top layer bitumen membrane

ARDEX WPM 114

Vented base sheet for moisture issues

3

Concrete substrate

ARCHITECTS, SPECIFIERS AND **DESIGNERS**

Industrial - Mechanically Fastened option



ARDEX WPM 612

1.14mm TPO large-scale roofing membrane

OR



ARDEX WPM 615

1.5mm TPO large-scale roofing membrane





ARDEX **Seam Plates**

For fastening of ARDEX TPO membranes





TPO and linsulation fastening



ARDEX Insulation Plates

For fastening of ARDEX Polyiso Board



ARDEX Polviso Board

@ 2

PIR foam insulation board



ARDEX **HD Cover Board**

High-density Polyiso Cover Board

Optional ARDEX WPM 3000X

OR ARDEX WPM 5000 HD

Industrial-strength, self-adhesive bituminous membrane



Self-adhesive bituminous membrane

Suitable substrate

ARCHITECTS, SPECIFIERS AND **DESIGNERS**

Industrial - Fully Adhered option



ARDEX WPM 612

1.14mm TPO large-scale roofing membrane






ARDEX WPM 615

1.5mm TPO large-scale roofing membrane

ARDEX WPM 649

TPO bonding adhesive

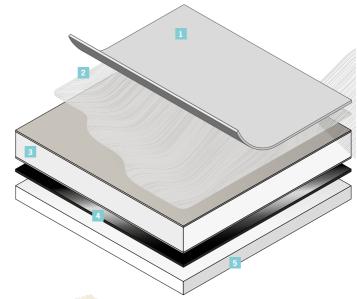

ARDEX Polviso Board

PIR foam insulation board

OR

HD Cover Board

High-density Polyiso Cover Board

Optional ARDEX WPM 3000X

Self-adhesive bituminous membrane

ARDEX WPM 5000 HD


Industrial-strength, self-adhesive bituminous membrane

5

Suitable substrate

ARCHITECTS, SPECIFIERS AND **DESIGNERS**

Remedial option

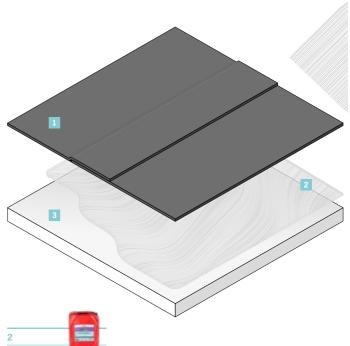



ARDEX WPM 717

WeldTec™ fleece-lined waterproofing membrane



Waterproofing membrane adhesive

3

Imperfect substrate or existing membrane

ARCHITECTS, SPECIFIERS AND **DESIGNERS**

Warm Roof option



ARDEX WPM 712

WeldTec™ 1.2mm weldable waterproofing membrane





ARDEX WPM 715

WeldTec™ 1.5mm weldable waterproofing membrane



ARDEX WA 98

Waterproofing membrane adhesive



Optional ARDEX HD Cover Board

High-density Polyiso Cover Board




ARDEX Polyiso Board

PIR foam insulation board



Suitable substrate

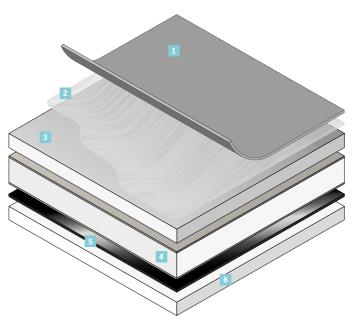



Optional ARDEX WPM 3000X

Self-adhesive bituminous membrane

ARCHITECTS, SPECIFIERS AND **DESIGNERS**

Green Roof option

Selected green roof build up



ARDEX DRS 10 GC

Drainage protection membrane



ARDEX WPM 712

WeldTec™ 1.2mm weldable waterproofing membrane





ARDEX WPM 715

WeldTec™ 1.5mm weldable waterproofing membrane




ARDEX Polyiso Board

PIR foam linsulation board




Substrate engineered to suit green roof

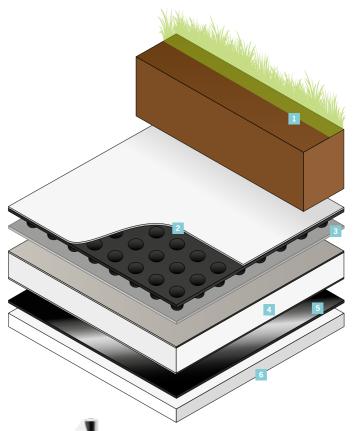

Optional ARDEX WPM 3000X

Self-adhesive bituminous membrane

ARCHITECTS, SPECIFIERS AND **DESIGNERS**

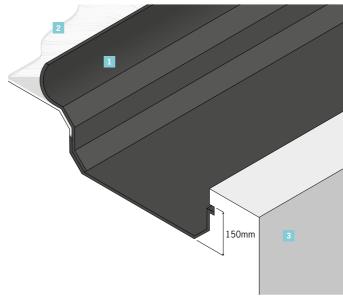



ARDEX WPM 712

WeldTec™ 1.2mm weldable waterproofing membrane



ARDEX WA 98

Waterproofing membrane adhesive


ARDEX WPM 715

WeldTec™ 1.5mm weldable waterproofing membrane

Selected substrate

ARCHITECTS, SPECIFIERS AND **DESIGNERS**

EXTERNAL TILING SYSTEM 1

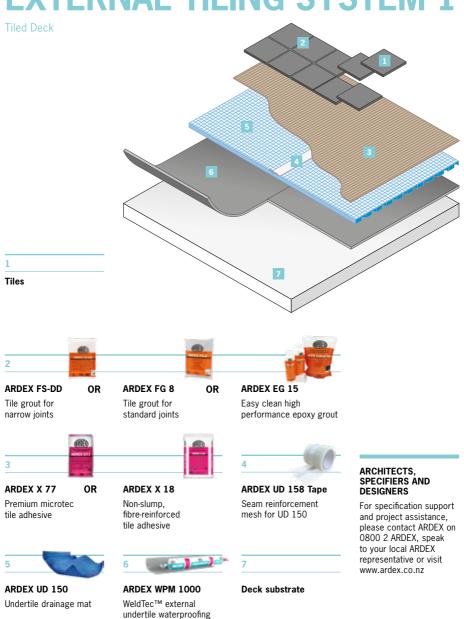

membrane.

DECK SYSTEM 1

Timber Deck

Timber decking

Timber bearer




DekCradle™

Timber decking support



ARDEX WA 98

Waterproofing membrane adhesive

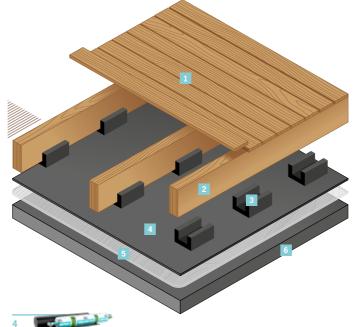

ARDEX WPM 715


WeldTec[™] weldable waterproofing membranes

6

Concrete substrate

ARCHITECTS, SPECIFIERS AND **DESIGNERS**

BELOW GRADE SYSTEM 1

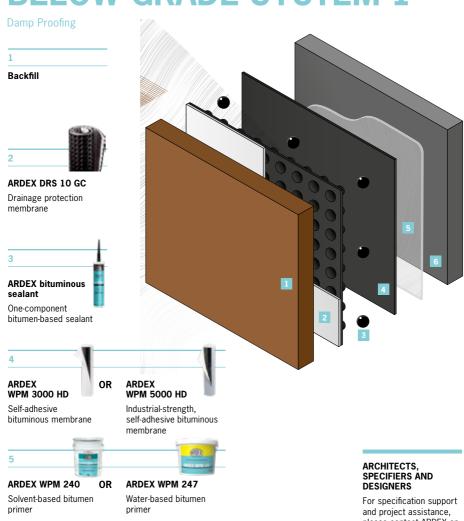


Concrete substrate

6

please contact ARDEX on 0800 2 ARDEX, speak to your local ARDEX representative or visit www.ardex.co.nz

BELOW GRADE SYSTEM 2

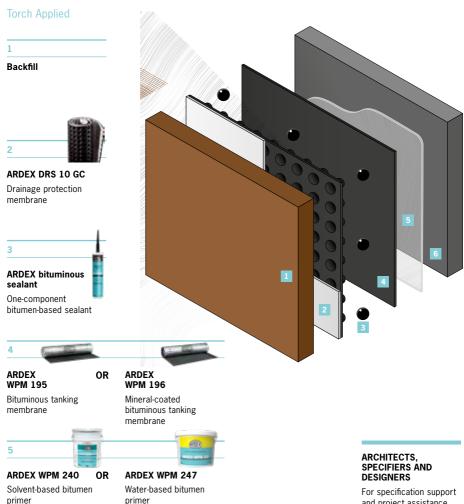


6

Concrete substrate

BELOW GRADE SYSTEM 3

Pre-applied Tanking

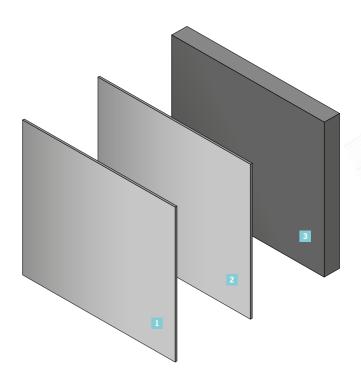

Sacrificial formwork or shotcrete




ARDEX WPM 1500

Drainage protection membrane


Cast concrete

ARCHITECTS, SPECIFIERS AND **DESIGNERS**


INTERNAL TILING SYSTEM 1

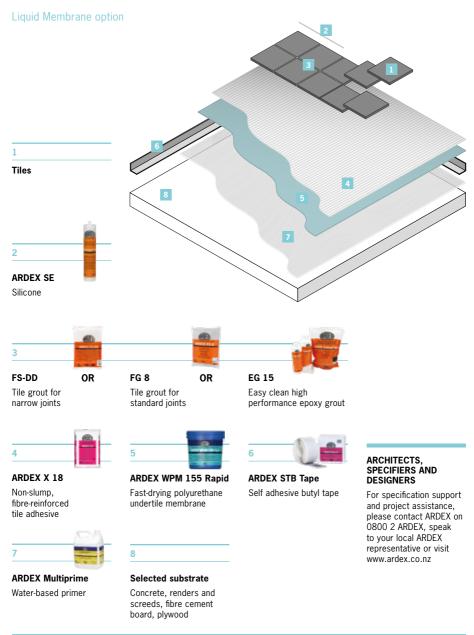

INTERNAL TILING SYSTEM 2

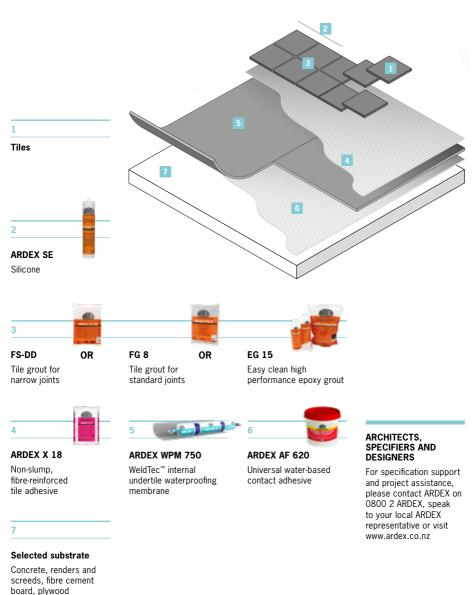

INTERNAL VINYL SYSTEM 1

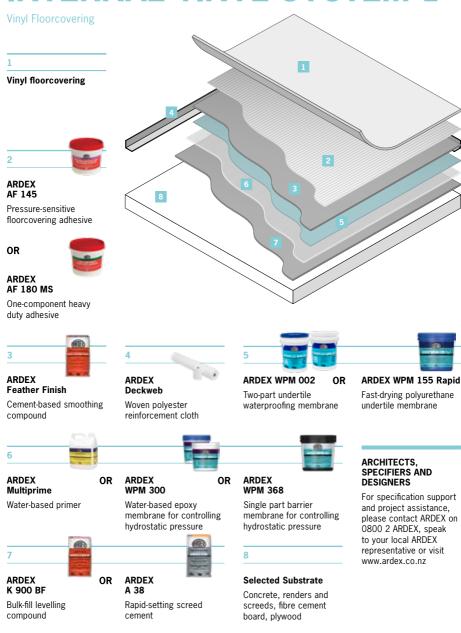







WELDTEC™ WELDABLE WATERPROOFING MEMBRANE





WELDTEC™ WELDABLE WATERPROOFING MEMBRANE



ARDEX WPM 712 is a 1.2mm weldable waterproofing membrane for roofing with properties which resist ageing from heat, sunlight and ozone.

- · Welded laps and seams for fast installation
- · Excellent resistance to atmospheric agents

Typical use

- External
- · Horizontal or vertical
- · Roofs

Substrates

- Concrete
- Plywood
- · Modified bitumen
- Malthoid
- · ARDEX Polviso or HD Cover Board
- · Orientated strandboard
- CFC sheet
- Timber
- · Galvanised metal
- Zincalume
- · Polyurethane foam

Gauge	1.2mm
Dimensions	20m x 1.4m
Codes	Black: 32581 Dove Grey: 32339

ARDEX WPM 715 is a 1.5mm weldable waterproofing membrane with properties which resist ageing from heat, sunlight and ozone.

- Welded laps and seams for fast installation
- · Excellent resistance to atmospheric agents

Typical use

- External
- Horizontal or vertical
- · Decks and roofs

Substrates


- · Concrete
- Plywood
- · Modified bitumen
- Malthoid
- · ARDEX Polviso or HD Cover Board
- · Orientated strandboard
- CFC sheet
- Timber
- · Galvanised metal
- Zincalume
- · Polyurethane foam

Gauge	1.5mm
Dimensions	20m x 1.4m
Codes	Black: 32336 Dove Grey: 32341

ARDEX **WPM 717**

WELDTEC™ FLEECE-BACKED **WELDABLE ROOFING MEMBRANE**





- Welded laps and seams for fast installation
- Suitable for use over imperfect substrates
- · Fleece-backed for ventilation and strong bonding

Typical use

- External
- · Horizontal or vertical
- Decks and roofs
- Imperfect surfaces
- · Substrates with residual moisture

Substrates

- Concrete
- Plywood
- · Modified bitumen
- Malthoid
- · ARDEX Polyiso or HD Cover Board
- · Orientated strandboard
- · CFC sheet
- Timber
- · Galvanised metal
- Zincalume
- · Polyurethane foam

Gauge	1.7mm including fleece (nominal)
Dimensions	20m x 1.4m
Codes	Black: 32343 Dove Grey: 32347

ARDEX WA 98



WATERPROOFING **MEMBRANE ADHESIVE**

ARDEX WA 98 is a high-performance roofing contact adhesive.

- · Contact adhesive
- · Solvent-based
- · Ideal for bonding large areas

Typical use

- External
- · Horizontal or vertical
- Adhering ARDEX WeldTec[™] and Butynol sheet membranes

Suitable membrane types

- WeldTec[™]
- Butvnol

Working time	15 – 60 minutes
Coverage	4 – 8m² bond area per litre
Codes	20L: 13052 4L: 10870

11:10869

ARDEX WPM 290



ARDEX **WPM 710 DT**



WELDTEC™ EXTERNAL DETAIL TAPE

ARDEX WA 98 SOLVENT

ARDEX WPM 290 is a mild solvent suitable for cleaning down surfaces and waterproofing membranes contaminated with dried ARDEX WA 98.

- · Coagulates for easier removal
- · Reduced damage to surfaces

Typical use

- Cleaning surfaces prior to adhesion
- Thinning ARDEX WA 98 when needed
- · Re-activating dry adhesive surfaces
- · Cleaning brushes and rollers
- · Removing excess adhesive

Codes 20L: 13050

41:10874 11:10873 ARDEX WPM 710 DT is a weldable detail tape for use with external ARDEX WeldTec membranes.

- · Available as tapes or patches
- Weldable
- · Resistant to atmospheric agents

Typical use

- External
- · Horizontal and vertical applications
- Detailing ARDEX WeldTec Membranes

Colours	Black, Dove Grey
Widths	100mm, 300mm, 150mmø patch
Gauge	1mm
Tape length	20m





BUTYL ROOFING AND TANKING MEMBRANE







MEMBRANE ADHESIVE

ARDEX Butynol is a synthetic rubber membrane with properties which resist ageing from heat, sunlight and ozone.

- Single-ply
- Flexible rubber synthetic membrane
- Remains flexible at low temperatures

Typical use

- External
- · Horizontal or vertical applications
- · Decks, roofs, gutters

Substrates

- Concrete
- Plywood
- ARDEX Polyiso or HD Cover Board
- · Orientated strandboard
- · CFC sheet
- Timber
- · Galvanised metal
- Zincalume

Colours	Various
Gauge	Available in numerous thicknesses
Dimensions	17.86m x 1.4m

ARDEX WA 98 is a high-performance roofing contact adhesive.

· Contact adhesive

ARDEX

- · Solvent-based
- · Ideal for bonding large areas

Typical use

- External
- · Horizontal or vertical
- Adhering ARDEX WeldTec[™] and Butynol sheet membranes

Suitable membrane types

- WeldTec[™]
- Butvnol

Working time	15 – 60 minutes
Coverage	4 – 8m² bond area per litre
Codes	20L: 13052 4L: 10870

1L: 10869



ARDEX WA 98 SOLVENT

ARDEX **WPM 299**

BUTYNOL SEAM PRIMER



ARDEX WPM 290 is a mild solvent suitable for cleaning down surfaces and waterproofing

membranes contaminated with dried ARDEX WA 98.

- · Coagulates for easier removal
- · Reduced damage to surfaces

Typical use

- Cleaning surfaces prior to adhesion
- Thinning ARDEX WA 98 when needed
- · Re-activating dry adhesive surfaces
- · Cleaning brushes and rollers
- · Removing excess adhesive

20L: 13050 Codes

41:10874 1L: 10873 ARDEX WPM 299 is primer-adhesive used with ARDEX Seam Tape for general lap bonding.

- · Water resistant
- · Improves seam tape adhesion
- Fast drying

Typical use

External

Codes

• Priming ARDEX Butynol and seam tape

18 - 23m² per litre Coverage

4L: 10205

1L: 10880

ARDEX DETAIL TAPE

SELF-ADHESIVE BUTYL TAPE

ARDEX Detail Tape is a self-adhesive, butyl-based tape, self-protected by a polypropylene fleece.

- Excellent adhesion at low temperatures
- · Excellent heat stability
- · High workability

Typical use

- Horizontal or vertical applications
- · Decks, roofs, gutters
- · Below-grade applications

Substrates

- Concrete
- Plywood
- · ARDEX insulation board
- · Orientated strandboard
- CFC sheet
- Timber
- · Galvanised metal
- Zincalume

Dimensions	30.4m x 150mm
Code	10584

ARDEX SEAM TAPE

SEAM TAPE FOR GENERAL LAP BONDING

ARDEX Seam Tape is a pressure-sensitive adhesive tape for bonding laps and seams of ARDEX Butynol membranes.


- · Provides strong, watertight seams
- · Fast and easy installation
- · High tack

Substrates

- · Concrete
- Plywood
- Timber
- Metals
- Glass Masonry
- Most plastics

Dimensions 30.4m x 50mm

Code 10539

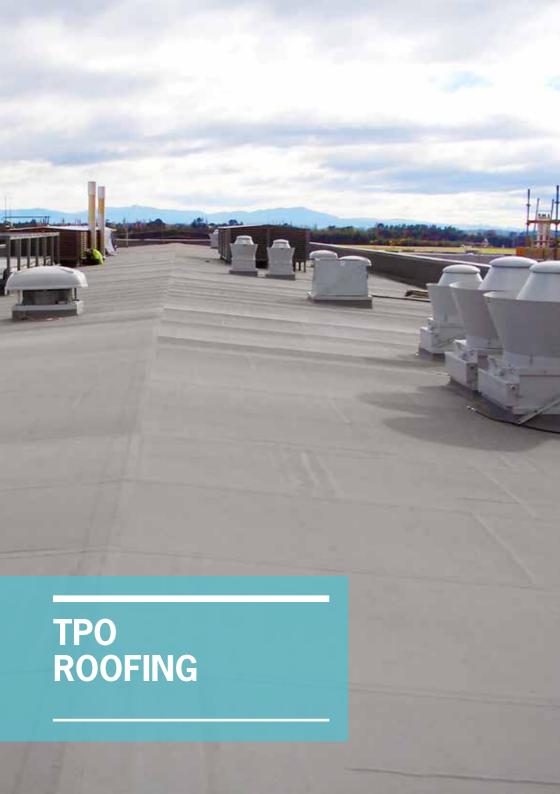




1.14MM TPO LARGE-**SCALE ROOFING MEMBRANE**



ARDEX WPM 615

1.5MM TPO LARGE-**SCALE ROOFING MEMBRANE**





ARDEX WPM 612 is a 1.14mm heat-weldable Thermoplastic Polyolefin roofing membrane for large, low-slope applications.

- · Energy efficient
- · Fast to install
- · No toxic emissions

Typical use

- External
- Roofing
- Low-slope
- · Large roof areas

Gauge	1.14mm
Dimensions	30.5m x 3.05m
Colour	Grey
Code	25225

ARDEX WPM 615 is a 1.5mm heat-weldable Thermoplastic Polyolefin roofing membrane for large, low-slope applications.

- · Energy efficient
- · Fast to install
- · No toxic emissions

Typical use

- External
- Roofing
- Low-slope
- · Large roof areas

Gauge	1.5mm
Dimensions	30.5m x 3.05m 30.5m x 2.05m
Colour	Grey
Codes	3.05m: 13506 2.05m: 11043



ARDEX WPM 657



TPO GENERAL PURPOSE SEALANT

TPO BONDING ADHESIVE

ARDEX WPM 649 is an adhesive for bonding ARDEX TPO membranes to ARDEX Polyiso and HD Cover Board.

- . Bonds ARDEX TPO to ARDEX insulation board
- · Solvent-based
- · Contact adhesive

Coverage	$1.1 - 1.5 \text{m}^2$ per litre

Code 191:22082 ARDEX WPM 657 is a high-quality sealant for adhesion to a variety of surfaces and in conjunction with ARDEX TPO systems.

- · Resistant to ozone, UV and general weathering
- Excellent adhesion to ARDEX TPO
- · Resistant to heat and cold

Coverage 183m per carton Code 310ml tube: 12607







TPO SEAM PLATES



ARDEX TPO QuickSeam Flashing is a non-reinforced Thermoplastic Polyolefin membrane laminated to a white cured seaming tape.

- · For flashing metal roof edge profiles
- · Excellent moisture resistance
- · Resistant to heat

Colours	Tape: White Flashing: White or Grey
Gauge	Tape: 0.89mm Flashing: 0.76mm
Dimensions	30.5m x 146mm
Codes	White: 11248 Grey: 12956

ARDEX HD Seam Plates are designed for attaching ARDEX TPO membranes to approved substrates in conjunction with ARDEX All Purpose Fasteners.

- · Galvalume Sheet steel material
- 4 inner and 4 outer evehook extensions for holding power
- · Corrosion resistance

Dimensions	Diameter circle: 60.3mm Gauge: 0.94mm Hole diameter: 6.7mm
Code	Pack of 1000: 12609

ARDEX TPO MEMBRANE DETAILING





TPO UNSUPPORTED FLASHING MEMBRANE

ARDEX provide a range of pre-cut and moulded TPO flashing and detailing products for use with ARDEX WPM 612 and WPM 615.

- Pipe boots and flashings
- Corners
- Pockets

|--|

ARDEX WPM 623 TPO Unsupported Flashing is a Thermoplastic Polyolefin Membrane for use where pre-moulded products are not appropriate.

- Non-reinforced Thermoplastic Polyolefin
- Suitable where pre-moulded products are not

Gauge	1.52mm
Dimensions	15.25m x 0.61m
Code	11052

ARDEX FASTENERS

TPO AND INSULATION **FASTENING**

ARDEX Fasteners are available as either All-Purpose or Heavy Duty Fasteners. They are specifically designed for mechanical attachment of ARDEX TPO membranes and roofing insulation.

• 1000 pieces per pail

Typical use

- External roofing
- · With ARDEX thermal insulation systems
- · Mechanically fastened systems

Thread size

• All Purpose: 6mm • Heavy Duty: 6.98mm

ARDEX **WPM 651**



TPO CUT EDGE SFALANT


ARDEX WPM 651 TPO Cut Edge Sealant is a polymer based sealant used to seal all cut edges of ARDEX TPO membranes where the polyester reinforcement is exposed.

- · Resistant to ozone, ultraviolet and general weathering
- · Excellent adhesion to ARDEX TPO sheet membranes
- · Resistant to heat, cold, moisture

Typical use

- · External roofing
- · With ARDEX TPO membranes
- · Mechanically fastened systems
- · On exposed polyester reinforcement

Colour	Grey
Code	7.5L: 13034

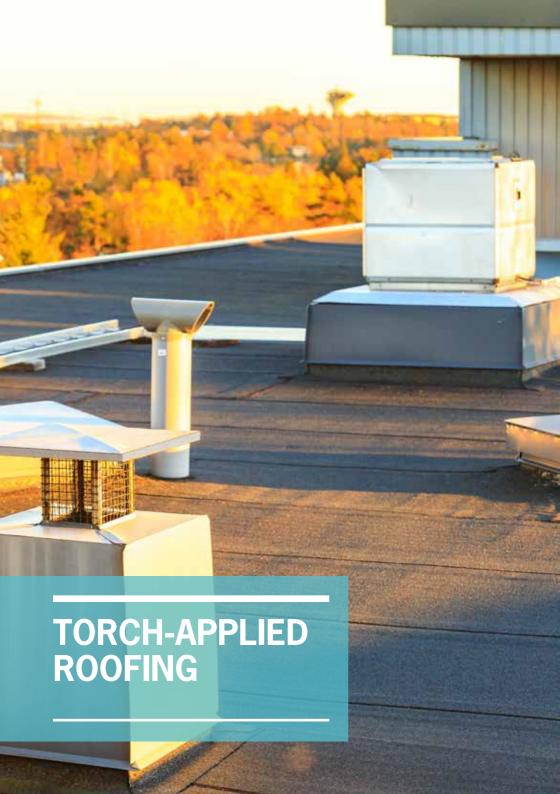

VENTED BASE SHEET FOR MOISTURE ISSUES



ARDEX WPM 114 is an APP modified bitumen membrane vented base sheet, for use in applications where there may be substrate moisture issues.

- · Suitable for substrates with moisture issues
- · Excellent cold flexibility

Typical use

- External
- Roofing
- · Base sheet in multi-layer systems

Substrates

· Concrete screeds

Gauge	4mm
Dimensions	10m x 1m
Code	25223

ARDEX WPM 117





ARDEX WPM 117 is a self-adhesive SBS modified bitumen membrane providing absolute waterproofing and resistance to hydrostatic pressure.

- · Reinforced with fibreglass
- · Peel and stick installation

Typical use

- General waterproofing
- · Base layer over heat sensitive substrates
- Areas where fire and torching must be avoided

Substrates

- Timber
- Zincalume
- Aluminium
- Concrete
- · ARDEX Polyiso Board

Gauge 2mm



BASE/MID-LAYER BITUMINOUS MEMBRANE







MULTI-LAYER REINFORCED **BITUMINOUS MEMBRANE**



ARDEX WPM 120 is an APP modified bitumen membrane, with a sanded or talc top finish and a heat-sensitive film underneath.

- · High puncture resistance
- · Heat welded installation

Typical use

- External
- · Balconies, terraces, roofs
- · Base or mid layer in multi-layer systems

Substrates

• Concrete

Gauge	2.5mm
Dimensions	15m x 1m
Code	10525

ARDEX WPM 180 is an APP modified bitumen membrane, reinforced with fibreglass and polyester and protected by a heat-sensitive film on the

- · Combined polyester and fibreglass reinforcement
- · Heat welded installation

Typical use

- External
- · Balconies, terraces, roofs
- · Multi-layer membrane

Substrates

Concrete

Gauge	3.5mm
Dimensions	10m x 1m
Code	10528

MINERAL-COATED TOP LAYER BITUMEN MEMBRANE



ARDEX WPM 189+

CERAMIC-COATED TOP LAYER BITUMEN MEMBRANE



ARDEX WPM 189 is a dual-layer modified bitumen membrane, comprised of an SBS bottom layer for cold flexibility and APP top layer for UV resistance.

- · Excellent cold flexibility and elasticity
- Excellent resistance to atmospheric agents
- High puncture resistance

Typical use

- External
- · Balconies, terraces, roofs
- As a cap sheet over base layers

Substrates

· Base layers

Gauge	4mm
Dimensions	10m x 1m
Codes	Black: 11324 Grey: 11242

ARDEX WPM 189+ is a 5mm dual-layer modified bitumen membrane, comprised of an SBS bottom layer for cold flexibility and APP top layer for UV resistance.

- · Excellent cold flexibility and elasticity
- Excellent resistance to atmospheric agents
- · Ceramic chip for longevity and colour fastness

Typical use

- External
- · Balconies, terraces, roofs
- As a cap sheet over base layers

Substrates

· Base layers

Gauge	5mm
Dimensions	8m x 1m
Codes	Grey: 32325 Black Gloss: 32326



SOLVENT-BASED BITUMEN PRIMER **ARDEX WPM 247**



WATER-BASED BITUMEN PRIMER

ARDEX WPM 240 is a solvent-based primer used to seal and prepare substrates prior to installing ARDEX bituminous membranes.

- Solvent-based
- For use with ARDEX bitumen systems
- · Fast drying

Coverage	5m² per litre
Codes	20L Black: 10534 20L Clear: 30626

ARDEX WPM 247 is a water-based primer used to seal and prepare substrates prior to installing ARDEX bituminous membranes.

- Water-based
- For use with ARDEX bitumen systems
- · High coverage

Colour	Black
Coverage	6m² per litre
Codes	20L: 11171 4L: 11172

ARDEX BITUMINOUS SEALANT ONE-COMPONENT BITUMEN-BASED SEALANT

ARDEX Bituminous Sealant is a one-component sealant with bitumen-based solvents, used for gluing, sealing and repairing bituminous membranes.

- · Good primerless adhesion
- · Easy to use
- UV stable

Typical use

- External
- Roofing
- · Sealing membrane edges
- · Between old bitumen membranes

- Tin
- Aluminium
- Copper
- Brass
- Ceramic
- Bitumen
- Concrete Plaster
- · Roof tiles

Colour	Black
Size	300ml
Code	25432



ARDEX WPM 3000X



SELF-ADHESIVE **BITUMINOUS MEMBRANE**



ARDEX WPM 3000X is a peel-and-stick, SBS rubber modified bituminous membrane for damp-proofing underground structures.

- Cold application
- · Self-seals on contact with substrate
- · Radon and methane barrier

Typical use

- · Below-ground applications
- Foundations
- · Retaining walls
- Balconies
- Planter boxes
- · Decks under cement screeds

Substrates

- · Concrete render and screeds
- · Fibre cement sheets
- · Structural or marine plywood
- · Polystyrene blocks

Gauge	1.5mm
Dimensions	20m x 1m
Code	10543

ARDEX WPM 5000HD



INDUSTRIAL-STRENGTH. **SELF-ADHESIVE BITUMINOUS MEMBRANE**



ARDEX WPM 5000HD is an industrial-strength, self-adhesive bituminous membrane, reinforced with polypropelene mesh.

- · High mechanical characteristics
- · Radon and methane gas barrier
- Self-healing

Typical use

- · Below-ground tanking
- Underground structures
- · Trafficable structures covered with asphalt
- · Expansion joints
- · Underneath clay tiles or asphalt shingles

- · Concrete render and screeds
- · Fibre cement sheets
- Structural or marine plywood
- · Polystyrene blocks

Gauge	1.5mm
Dimensions	20m x 1m
Code	10544

ARDEX DRS 10 GC



DRAINAGE PROTECTION **MEMBRANE**

ARDEX DRS 10 GC is a cuspated HDPE sheet with a geotextile layer that provides effective drainage and protection against backfill.

- · Effective drainage of sub-surface water
- · Excellent compressive strength
- 100% recycled material

Typical use

- · Below-grade applications
- · Basement foundations
- · Retaining walls
- · Planter boxes
- · Bridge abutments
- · Green roofs

Thickness	10mm
Dimensions	20m x 2m
Code	32142

ARDEX BITUMINOUS SEALANT





ARDEX Bituminous Sealant is a one-component sealant with bitumen-based solvents, used for gluing, sealing and repairing bituminous membranes.

- · Good primerless adhesion
- · Easy to use
- · UV stable

Typical use

- External
- Roofing
- · Sealing membrane edges
- · Between old bitumen membranes

- Tin
- Aluminium
- Copper
- Brass
- Ceramic
- Bitumen
- · Concrete
- Plaster
- · Roof tiles

Colour	Black	
Size	300ml	
Code	25432	



SOLVENT-BASED BITUMEN PRIMER

ARDEX WPM 240 is a solvent-based primer used to seal and prepare substrates prior to installing ARDEX bituminous membranes.

- Solvent-based
- For use with ARDEX bitumen systems
- · Fast drying

Coverage	5m² per litre dependent on substrate
Codes	20L Black: 10534 20L Clear: 30626

ARDEX WPM 247




WATER-BASED BITUMEN PRIMER

ARDEX WPM 247 is a water-based primer used to seal and prepare substrates prior to installing ARDEX bituminous membranes.

- Water-based
- For use with ARDEX bitumen systems
- · High coverage

Colour	Black
Coverage	6m² per litre
Codes	20L: 11171 4L: 11172

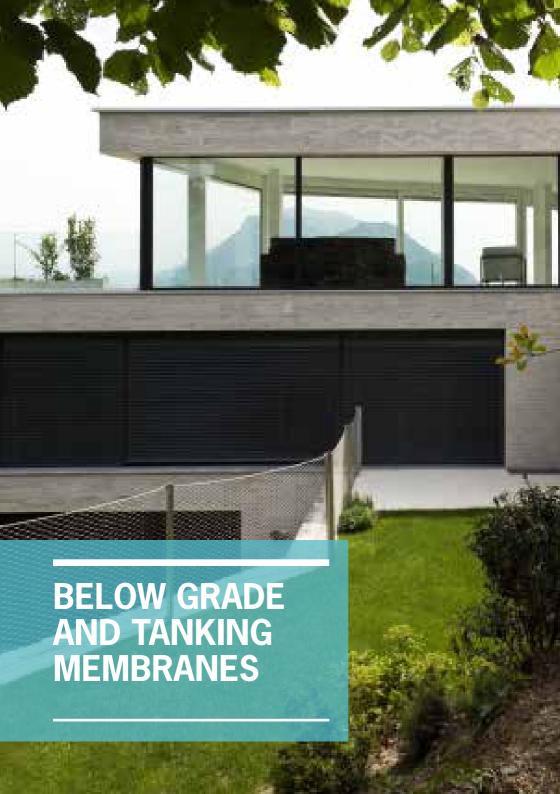



LIQUID RUBBER WATERPROOFING MEMBRANE

ARDEX WPM 179 is a one-component, latex modified, bituminous elastomeric liquid waterproofing membrane used for patching or repairs.

- · Quick drying
- · Contains root inhibitors
- · Excellent chemical resistance

Typical use

- · Below-grade
- Tanking

Substrates

- Masonty
- Concrete
- Steel
- · Sand cement screeds
- Renders

Colours

Black

Coverage

As a patch repair membrane: approx. 15m² As a waterproofing membrane: 8m²

15L: 12981 Code

ARDEX **WPM 188**



BITUMINOUS GARDEN TANKING MEMBRANE



ARDEX WPM 188 is a SBS modified bitumen membrane, reinforced with fibreglass and polyester, and contains a root growth inhibitor.

- · Positive vapour barrier
- · Good elongation and flexibility
- · Resists root growth

Typical use

- · Green roofs
- Planter boxes
- Garden beds

Gauge	3mm
Dimensions	10m x 1m
Code	10878

BITUMINOUS TANKING MEMBRANE

ARDEX WPM 195 is a high-performance SBS modified bituminous membrane with added elastoplastomeric polymers.

- · Excellent cold flexibility
- · Strong adhesive strength
- · Positive vapour barrier

Typical use

- Below-grade
- Tanking

Substrates

• Concrete

Gauge	4mm
Dimensions	8m x 1m
Code	25075

ARDEX **WPM 196**

MINERAL-COATED BITUMINOUS TANKING MEMBRANE

ARDEX WPM 196 is a SBS modified bituminous membrane, with excellent strength and dimensional stability.

- · Positive vapour barrier
- · Proven performance in cold regions
- Accommodates structural movements

Typical use

- · Below-grade
- Tanking

Gauge	4mm
Dimensions	8m x 1m
Code	26034





WELDTEC™ TANKING MEMBRANE

ARDEX WPM 1000 RR is a high-performance, heatweldable membrane designed for areas exposed to soil and plants.

- · Contains a premium root inhibitor
- WeldTec[™] technology for strong laps and detailing
- Excellent chemical resistance properties

Typical use

- · Green roofs
- · Retaining walls
- Planter boxes
- Anywhere susceptible to roots causing damage

Substrates

- Concrete
- Plywood
- · Modified bitumen
- Malthoid
- · ARDEX Polyiso or HD Cover Board
- · Orientated strandboard
- CFC sheet
- Timber
- · Galvanised metal
- Zincalume
- · Polyurethane foam

Gauge	1mm
Dimensions	20m x 1.4m
Code	24578

ARDEX WPM 1500 is a pre-applied, fleece-lined, weldable waterproofing membrane for below ground tanking and gas barrier applications.

- WeldTec[™] technology for strong laps and detailing
- · Natural gas barrier
- · High elongation

Typical use

- · Below-grade
- Tanking
- · Outside building sub-structures

- Concrete
- Plywood
- · Modified bitumen
- Malthoid
- · ARDEX Polyiso or HD Cover Board
- · Orientated strandboard
- · CFC sheet
- Timber
- · Galvanised metal
- Zincalume
- · Polyurethane foam
- · Shot crete

Gauge	1.5mm
Dimensions	20m x 1.4m
Code	19807

ARDEX DRS 10 GC



DRAINAGE PROTECTION MEMBRANE

ARDEX DRS 10 GC is a cuspated HDPE sheet with a geotextile layer that provides effective drainage and protection against backfill.

- · Effective drainage of sub-surface water
- · Excellent compressive strength
- 100% recycled material

Typical use

- Below-grade applications
- · Basement foundations
- · Retaining walls
- · Planter boxes
- · Bridge abutments

Thickness	10mm
Dimensions	20m x 2m
Code	32142

ARDEX **WPM 1950**

HYDROPHILIC RUBBER JOINT

ARDEX WPM 1950 is a hydrophilic, swelling, polymeric rubber joint for use in areas of fresh water.

- Solves construction detailing problems
- · Unaffected by long-term wet-dry cycles
- · Sustains effective seal in wet conditions

Typical use

· Fresh water

Substrates

Concrete

Gauge	10mm
Dimensions	8m x 20mm
Code	30127



HYDROPHILIC RUBBER JOINT FOR MARINE SITUATIONS

ARDEX WPM 1955 is a hydrophilic, swelling, polymeric rubber joint for use in areas of brakish, saline or briny salt water.

- Solves construction detailing problems
- Unaffected by long-term wet-dry cycles
- Designed specifically for marine environments

Typical use

- · Salt water
- Marine applications

Substrates

• Concrete

Gauge	10mm
Dimensions	8m x 20mm
Code	30146

ARDEX WPM 1960

HYDROPHILLIC WATER **STOP FOR JOINTS**



ARDEX WPM 1960 is an elastic paste with water swellable properties and is applied like a sealant.

- · Ideal for use in areas of difficult access
- · Improves watertightness on rough surfaces
- · Unaffected by repetitive wet-dry cycles


Typical use

- · Concrete joints
- · Rough surfaces
- · Precast cable ducts and pipes

Substrates

• Concrete

Coverage	1.5m with 16mm diameter bead
Code	32782

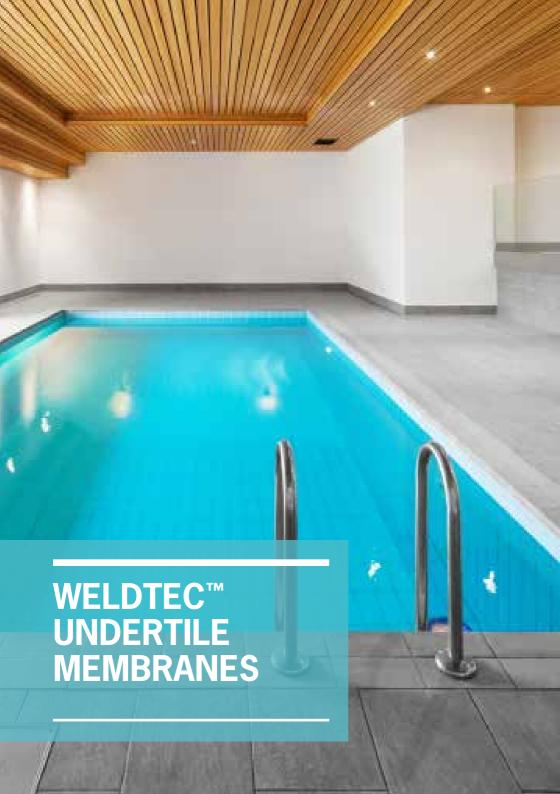

ARDEX (COMPANY) **WPM 750**

WELDTEC™ INTERNAL UNDERTILE WATERPROOFING **MEMBRANE**





WELDTEC™ EXTERNAL UNDERTILE WATERPROOFING **MEMBRANE**



ARDEX WPM 750 is a fleece-lined waterproofing sheet membrane specially formulated for the direct adhesion of internal tiled surfaces.

- WeldTec[™] technology for strong laps and detailing
- · Fleece-lined for better adhesion
- · Excellent flexibility

Typical use

- Internal
- Undertile

Substrates

- Concrete
- Plywood
- · CFC sheet
- Timber
- · Polyurethane foam
- Plasterboard

Gauge	0.75mm
Dimensions	20m x 1.4m
Code	13319

ARDEX WPM 1000 is a fleece-lined waterproofing sheet membrane designed to be used on direct adhesion of tiled systems externally or for other non-exposed use.

- WeldTec[™] technology for strong laps and detailing
- · Fleece-lined for better adhesion
- · Excellent flexibility

Typical use

- External
- Undertile

- Concrete
- Plywood
- · CFC sheet
- Timber
- · Polyurethane foam
- Plasterboard

Gauge	1.2mm
Dimensions	20m x 1.4m
Code	16475

ARDEX WA 98



WATERPROOFING MEMBRANE **ADHESIVE**

ARDEX WA 98 is a high-performance membrane contact adhesive.

- · Contact adhesive
- Solvent-based
- · Ideal for bonding large areas

Typical use

- · Horizontal or vertical
- Adhering ARDEX WeldTec[™] and butynol sheet membranes

Suitable membrane types

WeldTec[™]

Butynol

Working time 15 – 60 minutes

Coverage 4 - 8m² bond area per litre

Codes 20L: 13052

> 4L: 10870 1L: 10869

ARDEX AF 620



INTERNAL WATER-BASED CONTACT ADHESIVE

ARDEX AF 620 is a water-based dispersion contact adhesive ideal for installing both floorcoverings and WeldTec™ undertile membranes.

Typical use

- Internal
- Permanent

Substrates

- Concrete
- Timber
- · Hardboard underlay
- Plasterboard

Coverage Up to 5m² per pail

Code 2.5kg: 19990

ARDEX WELDTEC™ DETAILING







UNDERTILE DRAINAGE MAT

ARDEX WeldTec™ Detailing Products ensure secure waterproofing in corners and edges of ARDEX WeldTec™ undertile membranes.

- · Edge detailing
- · Corner detailing
- Detail tape

Typical use

- Internal
- Undertile

Substrates

- Concrete
- Plywood
- · CFC sheet
- Timber
- · Polyurethane foam
- Plasterboard

Dimensions	Refer to ardex.co.nz for dimensions, quantities, and colours of each product

ARDEX UD 150 is a thin, mesh-reinforced plastic drainage mat for use under directly adhered tiled surfaces.

- Isolates tiles surface from substrate movement
- · Allows passive drainage through surface
- · Reduces likelihood of efflorescence

Typical use

- External
- · Under tiling

- · Concrete
- Screed
- Plywood • CFC sheet

Thickness	9mm
Dimensions	1.96m x 1.02m
Code	30322





TWO-PART UNDERTILE WATERPROOFING MEMBRANE



ARDEX WPM 002 is a durable, fast drying two component waterproofing membrane specifically designed for external undertile waterproofing.

- · Fibre reinforced for increased strength
- · Resistant to re-emulsification
- · Extremely fast drying

Typical use

- · Internal or external
- · Horizontal or vertical
- Undertile

Substrates

- Concrete
- · Renders and screeds
- · Fibre cement board
- · Plasterboard (internal only)
- Plywood (internal only)

Cure time	3 days at 23°C
Coverage	Floors: 16m² Walls: 24m²
Codes	Part A - Liquid - 20kg: 10595 Part B - Powder - 20kg: 10597

ARDEX WPM 155 RAPID



FAST-DRYING POLYURETHANE UNDERTILE MEMBRANE



ARDEX WPM 155 Rapid is a water-based. polyurethane-acrylic waterproofing membrane for high-performance under-tile waterproofing.

- · Extended coverage
- · Extremely fast drying
- Solvent-free

Typical use

- · Commercial or residential
- Internal or external

Substrates

- Concrete
- · Renders and screeds
- · Fibre cement board
- Plywood (internal only)
- Plasterboard
- CFC sheet

Codes

Cure time	Renders and screeds: 7 days Concrete: 28 days
Coverage	Floors: 0.5m ² per litre Walls: 1.1m ² per litre

41:19728 15L: 19727



WATER-BASED EPOXY **MEMBRANE**





SINGLE PART BARRIER **MEMBRANE**

ARDEX WPM 300 is a two-component, epoxy polyamide membrane/barrier coating, which prevents rising damp and efflorescence.

- Adheres to damp surfaces and green concrete
- · Approved for use with potable water
- Withstands hydrostatic pressure

Typical use

- · Internal or external
- · Walls or floors

Substrates

- Brick
- Masonry
- · Concrete block
- Concrete
- Stone

Cure time	7 days
Coverage	1.5m ² per litre
Codes	20L kit: 8000021 4L kit: 10207

ARDEX WPM 368 is an acrylic co-polymer membrane that prevents rising damp and efflorescence, and resists negative hydrostatic pressure.

- · Adheres to damp surfaces and green concrete
- · Withstands hydrostatic pressure
- · Built in mechanical key

Typical use

- · Internal or external
- · Walls or floors
- Tanking applications

- Brick
- Masonry
- · Concrete block
- Concrete
- Stone

Cure time	7 days
Coverage	3m² per coat per litre
Code	20kg: 19623

ARDEX DECKWEB

WOVEN POLYESTER
REINFORCEMENT CLOTH

ARDEX Deckweb is a reinforced cloth for use with liquid waterproofing membranes to build membrane thickness in critical areas such as cracks, movement joints and corners.

Typical use

· Internal or external

Dimensions	50m x 190mm	

Code 10293

ARDEX ST TAPE

SELF ADHESIVE BUTYL TAPE



ARDEX ST Tapes are uncured, self-adhesive tapes used to reinforce critical areas and detailing when using ARDEX WPM 155 Rapid.

- · High tear resistance
- · Alkali resistance
- · High elasticity

Typical use

- Internal
- In conjunction with ARDEX WPM 155 Rapid

Dimensions STA Sheets: 2.4m x 400mm STB Tapes: 15m x 75mm

Codes STA Sheets: 19216 STB Tapes: 16870

ARDEX MULTIPRIME



WATER-BASED **PRIMER**

ARDEX



SINGLE-PART **PRIMER**

ARDEX Multiprime is a water-based primer for improving adhesion of ARDEX products to various porous substrates.

- · Quick drying
- · Solvent-free
- Low VOC

Typical use

- · Internal or external
- · Walls and floors

Substrates

- · Fibre cement sheet
- Plasterboard
- · Concrete renders and screeds
- Masonry
- · Concrete blocks
- · Aerated concrete

Drying time	15 – 30 minutes
Coverage	6m² per litre
Codes	20L: 10155 4L: 10156 1L: 10154

ARDEX P 9 Single Part Primer is a water-based primer used for improving the adhesion of ARDEX products to smooth, dense and various non-porous substrates.

- Solvent-free
- Low VOC content
- · Easy to apply


Typical use

- · Internal or external
- · Walls and floors

- Internal particleboard
- Plywood
- · Sheet timber
- · Fibre-cement sheet
- Plasterboard
- · Concrete renders and screeds
- Masonry
- · Aerated concrete
- · Concrete blocks
- · Glazed tiles

Drying time	20 minutes
Coverage	6 – 10m² per litre
Codes	4L: 16778 1L: 16791



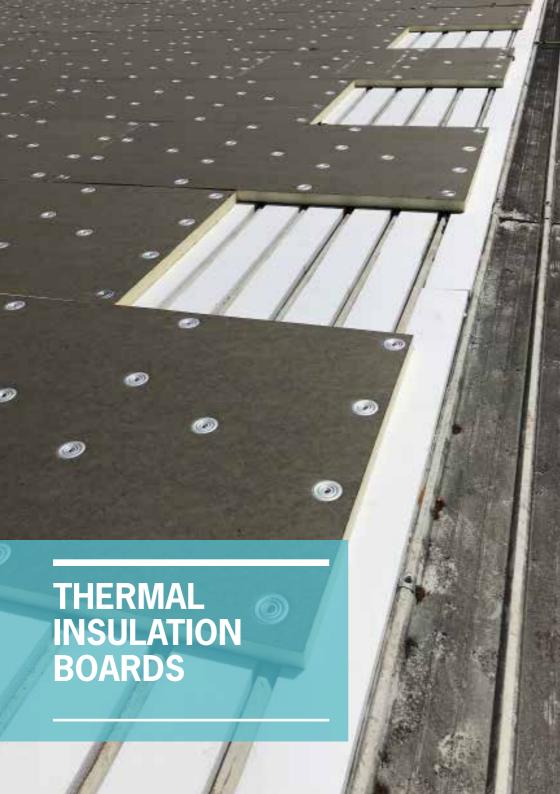

ARDEX POLYISO INSULATION BOARD

PIR FOAM INSULATION BOARD

The ARDEX Polyiso Insulation Board is lightweight and provides high-energy efficiency through outstanding thermal resistance.

- · Excellent dimensional and compressive strength
- · Easy to handle
- · Does not deplete earth's ozone layer

Typical use

- External
- Roofing
- · Under ARDEX waterproofing membranes

Gauge	76mm and 101.6mm
Coverage	2.25m x 1.22m
Codes	76mm: 24955

101.6mm: 24826

ARDEX HD COVER BOARD

HIGH-DENSITY POLYISO COVER BOARD

ARDEX HD Cover Board is a high density, closed-cell, Polyisocyanurate foam core for use as an insulative cover board.

- · Outstanding thermal performance
- · Only 5kg per board
- · Easy to cut and handle

Typical use

- External
- Roofing
- Under ARDEX waterproofing membranes

Gauge	12.7mm
Coverage	2.25m x 1.22m
Code	12926

INSULATION PLATES



FOR FASTENING OF ARDEX **POLYISO BOARD**

ARDEX Polyiso Insulation Plates are designed specifically for use with ARDEX Polyiso Boards and HD Cover Boards in a mechanically attached system.

Typical use

- · External roofing
- · With ARDEX thermal insulation systems
- · Mechanically fastened systems

Code 24071

ARDEX FASTENERS

TPO AND INSULATION FASTENING

ARDEX Fasteners are available as either All-Purpose or Heavy Duty Fasteners. They are specifically designed for mechanical attachment of ARDEX roofing insulation.

• 1000 pieces per pail

Typical use

- External roofing
- With ARDEX thermal insulation systems
- · Mechanically fastened systems

Thread size

- All Purpose: 6mm
- . Heavy Duty: 6.98mm





ARDEX UD 150



UNDERTILE DRAINAGE MAT

ARDEX UD 150 is a thin, mesh-reinforced plastic drainage mat for use under directly adhered tiled surfaces.

- · Isolates tiles surface from substrate movement
- Allows passive drainage through surface
- · Reduces likelihood of efflorescence

Typical use

- External
- · Under tiling

Substrates

- Concrete
- Screed
- Plywood
- · CFC sheet
- ARDEX single-layer sheet membranes

Thickness	9mm
Dimensions	1.96m x 1.02m
Code	30322

ARDEX DRS 10 GC



DRAINAGE PROTECTION **MEMBRANE**

ARDEX DRS 10 GC is a cuspated HDPE sheet with a geotextile layer that provides effective drainage and protection against backfill.

- Effective drainage of sub-surface water
- Excellent compressible strength
- 100% recycled material

Typical use

- · Below-grade applications
- · Basement foundations
- · Retaining walls
- Planter boxes
- · Bridge abutments

Thickness	10mm
Dimensions	20m x 2m
Code	32142

ARDEX UD 158



SEAM REINFORCEMENT MESH FOR UD 150

ARDEX UD 158 is a mesh tape used for the reinforcement of butted joins and seams in ARDEX drainage systems such as ARDEX UD 150.

Typical use

- External
- Under tiling
- Use with ARDEX UD 150

Dimensions 10m x 105mm

Code 24397



