


ARDEX BG 90 GP

GENERAL PURPOSE CLASS-A-TYPE CONSTRUCTION GROUT

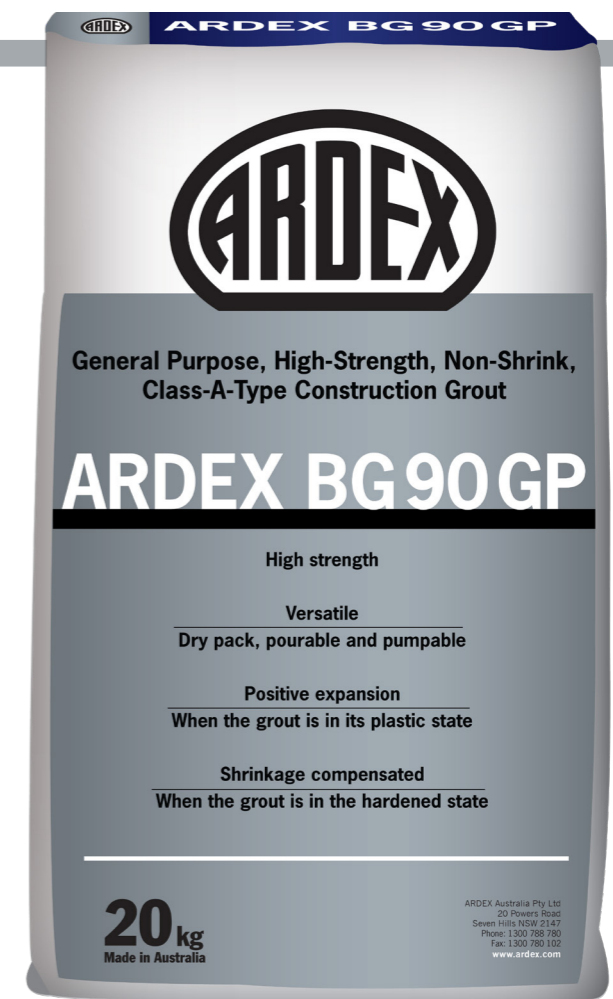

ARDEX BG 90 GP is a general purpose, high-strength, Class-A-Type construction grout that can be mixed to a non-slump or pourable mix. The cement-based formulation contains additives that provide positive expansion when the grout is in its plastic state, and is shrinkage compensated in the hardened state. Ideal for applications where high compressive and flexural strength is required.

- Versatile - packable, pourable, pumpable
- Positive expansion in plastic state
- Shrinkage compensated in hardened state
- High strength
- Suitable for applications from 12-100mm

Final set times

- Stiff: 30 - 60 mins
- Plastic: 3 - 5 hours
- Flowable: 5 - 7 hours

Typical uses:

- General purpose grouting applications
- Base plates, machine plates, equipment support
- Column bases (steel and precast concrete)
- Precast panel connections and between precast panels
- Underpinning
- Void filling and dry packing
- Conveyor supports

Packaging

20kg bag

Code

25104



To find out more call 0800 227 339
or visit www.ardex.co.nz

