


ARDEX BR 460 Flow

HIGH PERFORMANCE FLOWABLE STRUCTURAL MICRO CONCRETE

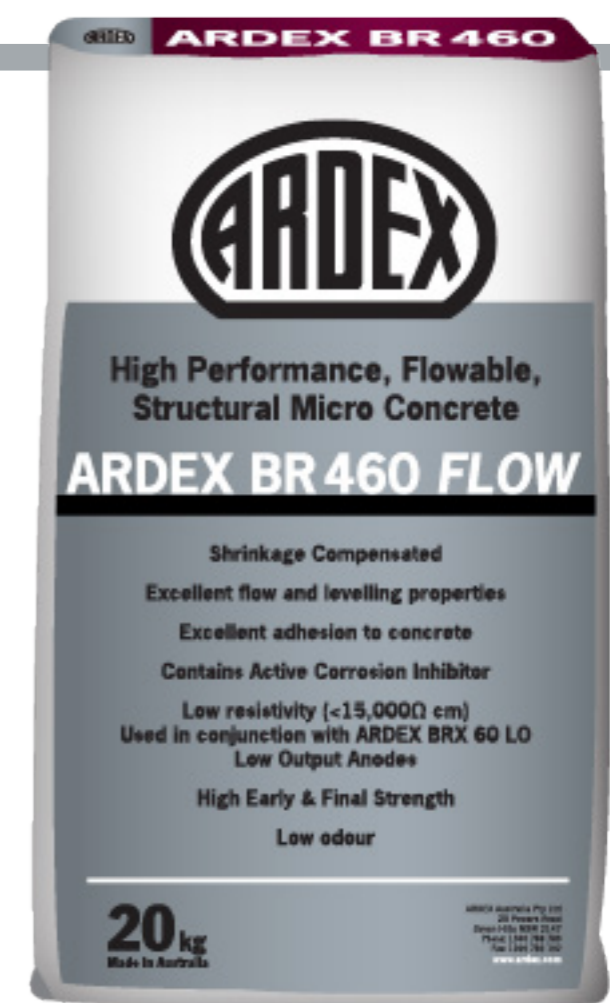

ARDEX BR 460 FLOW Micro Concrete is a pourable repair mortar designed for reinstating horizontal concrete surfaces damaged through concrete spalling and other chemical or mechanical causes. ARDEX BR 460 FLOW exhibits superior flow characteristics and is designed to be used in conjunction with ARDEX BRX 60 LO Low Output Anodes for ultimate corrosion control and cathodic prevention.

- Shrinkage compensated
- Excellent flow and levelling properties
- Excellent adhesion to concrete
- Contains active corrosion inhibitor
- Low resistivity
- High early and final strength
- Low odour
- Meet or exceeds Class R4 of EN 1504

Set times

- Pot life: to be used immediately after mixing
- Initial set: 5 - 8 hours
- Final set: 6 - 9 hours

Coverage

- 0.5m² per 20mm thickness per 20kg bag

Thickness

- 20 - 200mm

System Components

- Priming & Additive: ARDEX WR Prime
- Bonding Bridge: ARDEX BRP 30 EP
- Zinc Primer: ARDEX BR 10 ZP
- Corrosion Control: ARDEX BRX 60 LO

Packaging

20kg bag

Code

24543



To find out more call 0800 227 339
or visit www.ardex.co.nz

