


ARDEX WPM 189

MINERAL COATED BITUMEN MEMBRANE

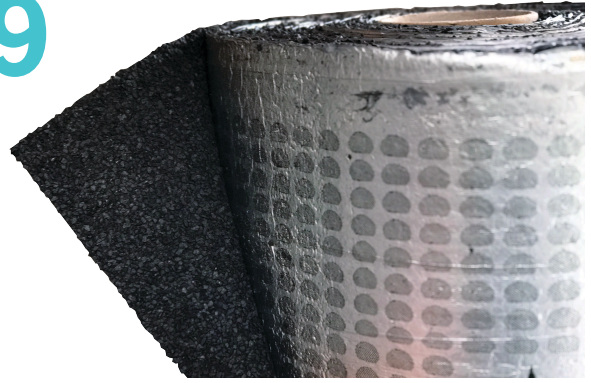

ARDEX WPM 189 is a dual-layer, modified bitumen membrane, consisting of a specially formulated bituminous compound. The bottom layer of ARDEX WPM 189 comprises of an SBS compound which gives high elasticity and excellent flexibility at low temperatures. The top layer is then formed from APP modified bitumen which provides good cold flexibility and high resistance to heat and UV radiation.

Benefits

- Branz Appraisal (No.463)
- CodeMark Certification (AQ-030516-CMNZ)
- 4mm thickness
- 5kg/m² Mineral Coated SBS/APP Bitumen Membrane
- Excellent resistance to atmospheric agents
- Resistant to chemical attacks
- High puncture resistance
- Heat welded laps provide a homogeneous join
- Excellent cold flexibility and elasticity
- Excellent elongation
- Improved dimensional stability

Size

Rolls of 1m by 10m.

Substrates

- Structural or Marine Plywood
- Strandsarking
- Concrete
- Existing Bitumen

Packaging


Black Chip
Grey Chip

Code

11324
11242

Use

Ideal for use as a multi-layer membrane in horizontal or vertical applications for waterproofing balconies, terraces and roofs.

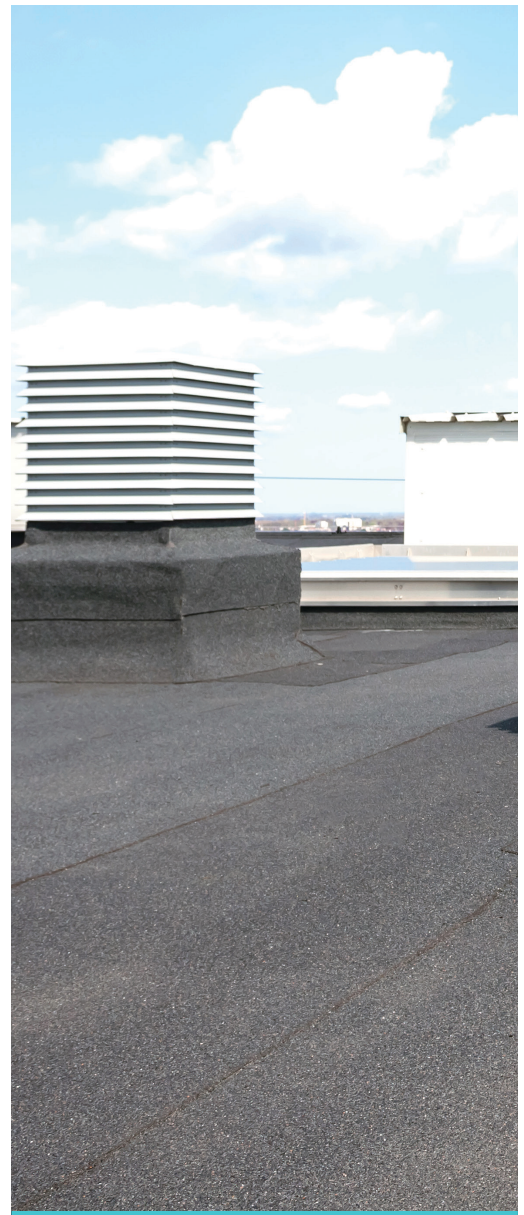

To find out more
call 0800 227 339 or
visit www.ardex.co.nz

Download the ARDEX app



search for:
'ARDEX New Zealand'



SYSTEMARDEX
PREMIUM PERFORMANCE